




STANDARD FEATURES


- **STYLISH INNOVATIVE DESIGN**
On high quality materials enhances any store application and optimizes product display.
- **STAINLESS STEEL**
Stainless Steel construction with plastic ends and anodized aluminum profile provides durability and ease of cleaning.
- **ANGLED DOWN TOP GLASS FRONT**
Elegantly curved with interior fluorescent light, on non-SL models.
- **EFFICIENT REFRIGERATION SYSTEM**
Factory engineered oversized and balanced refrigeration system.
CFC free R-134a refrigerators maintain temperature from 36°F to 46°F for the best in food preservation.
- **SUSHI CASES**
Include refrigeration on top and bottom of food pans.
- **TAPAS CASES**
Include refrigeration on bottom of food pans only.
- **RIGHT SIDE MOUNT COMPRESSOR**
Allows easy service without being moved.
- **THERMOSTAT TEMPERATURE CONTROL**
With indicator thermometer for enhanced performance.
- **TEMPERED SIDE GLASS SLIDING DOOR AT CHEF SIDE.**
- **LARGE INTERIOR, UP TO 11.5" PLATE FOR DISPLAY**
Interior grate can be turned upside down to increase over-all internal height and cooling capacity.
- **1/3 GASTRONORM TRAYS**
1.5" Deep are included in Tapas Cases.
- **DRAIN INCLUDED**
Located underneath pans to keep unit clean.

Sushi & Tapas DISPLAY CASES


- ▣ ACTC-55
- ▣ ACTC-69
- ▣ ACTC-55-SL
- ▣ ACTC-69-SL

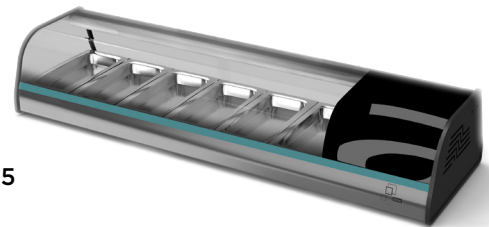


ACTC-55

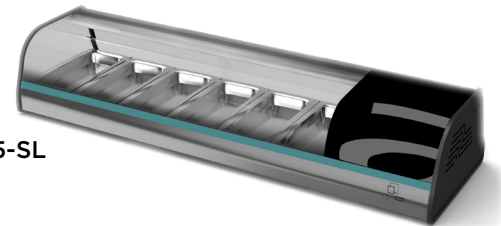

ACTC-55-SL

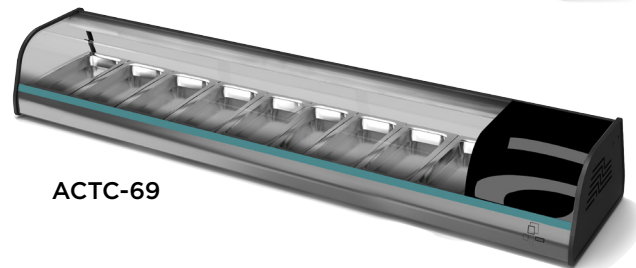

ACTC-69

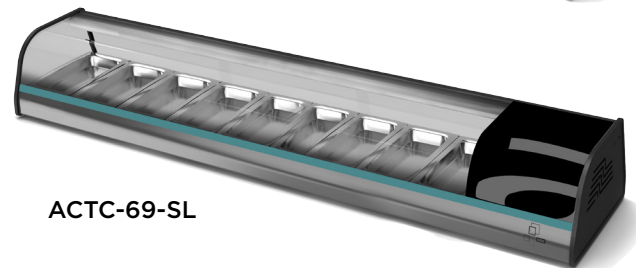

ACTC-69-SL

OPTIONS & ACCESSORIES


220 volts/50cycles/1 phase




MODEL	PANS	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGTH	CABINET DIMENSIONS			SHIPPING	
							L	D	H	WT.	CUBES
TAPAS CASE											
ACTC-55	6	4.2	1/5	115/60/1	5-15P	8'	54 3/8"	15 3/4"	9 5/8"	119	7.2
ACTC-69	8	4.2	1/5	115/60/1	5-15P	8'	68 3/8"	15 3/4"	9 5/8"	135	10.5
SUSHI CASE											
ACTC-55-SL	6	4.2	1/5	115/60/1	5-15P	8'	54 3/8"	15 3/4"	9 5/8"	125	7.2
ACTC-69-SL	8	4.2	1/5	115/60/1	5-15P	8'	68 3/8"	15 3/4"	9 5/8"	151	10.5

* Refrigerated display case. Not for overnight storage.


ACTC-55 (SL) Top

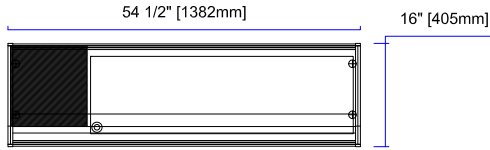


ACTC-69 (SL) Top Front

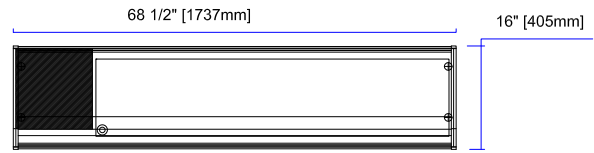


ACTC-55 (SL) Front

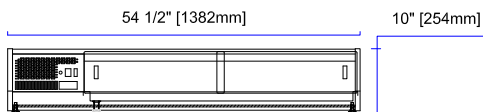


ACTC-69 (SL) Front

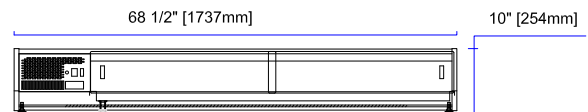

ACTC (SL)-Common View

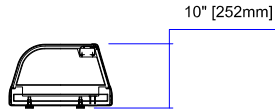

* Specifications



CONSTRUCTION

- Heavy duty stainless steel construction with plastic ends and anodized aluminum profile.
- Stylish curved frontal glass with sliding glass service door on chef side.

TRAYS & LIGHTS

- Standard with 1/3rd gastronorm pans, 1.5" deep
- Protected internal fluorescent light, only in non-SL models.
- Drain located in each unit, below pans.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system, holds temperature at 36°F to 46°F.
- Self-contained capillary tube system using environmentally friendly and CFC-free refrigerant (R-134A).
- Static refrigeration below the pans. SL models have a large evaporator coil on top and a static refrigeration cold plate on bottom.

- Evaporator coil is mounted on the left side of the unit. Automatic condensate evaporator, no drain connection required.
- Evaporator condensate is plumbed to a condensate pan located in the compressor housing.
- Simple plug-in installation, no plumbing necessary.
- Thermostat temperature control with indicator thermometer.

ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

* Asber's specifications are subject to change without notice as we continue to make product improvements.